








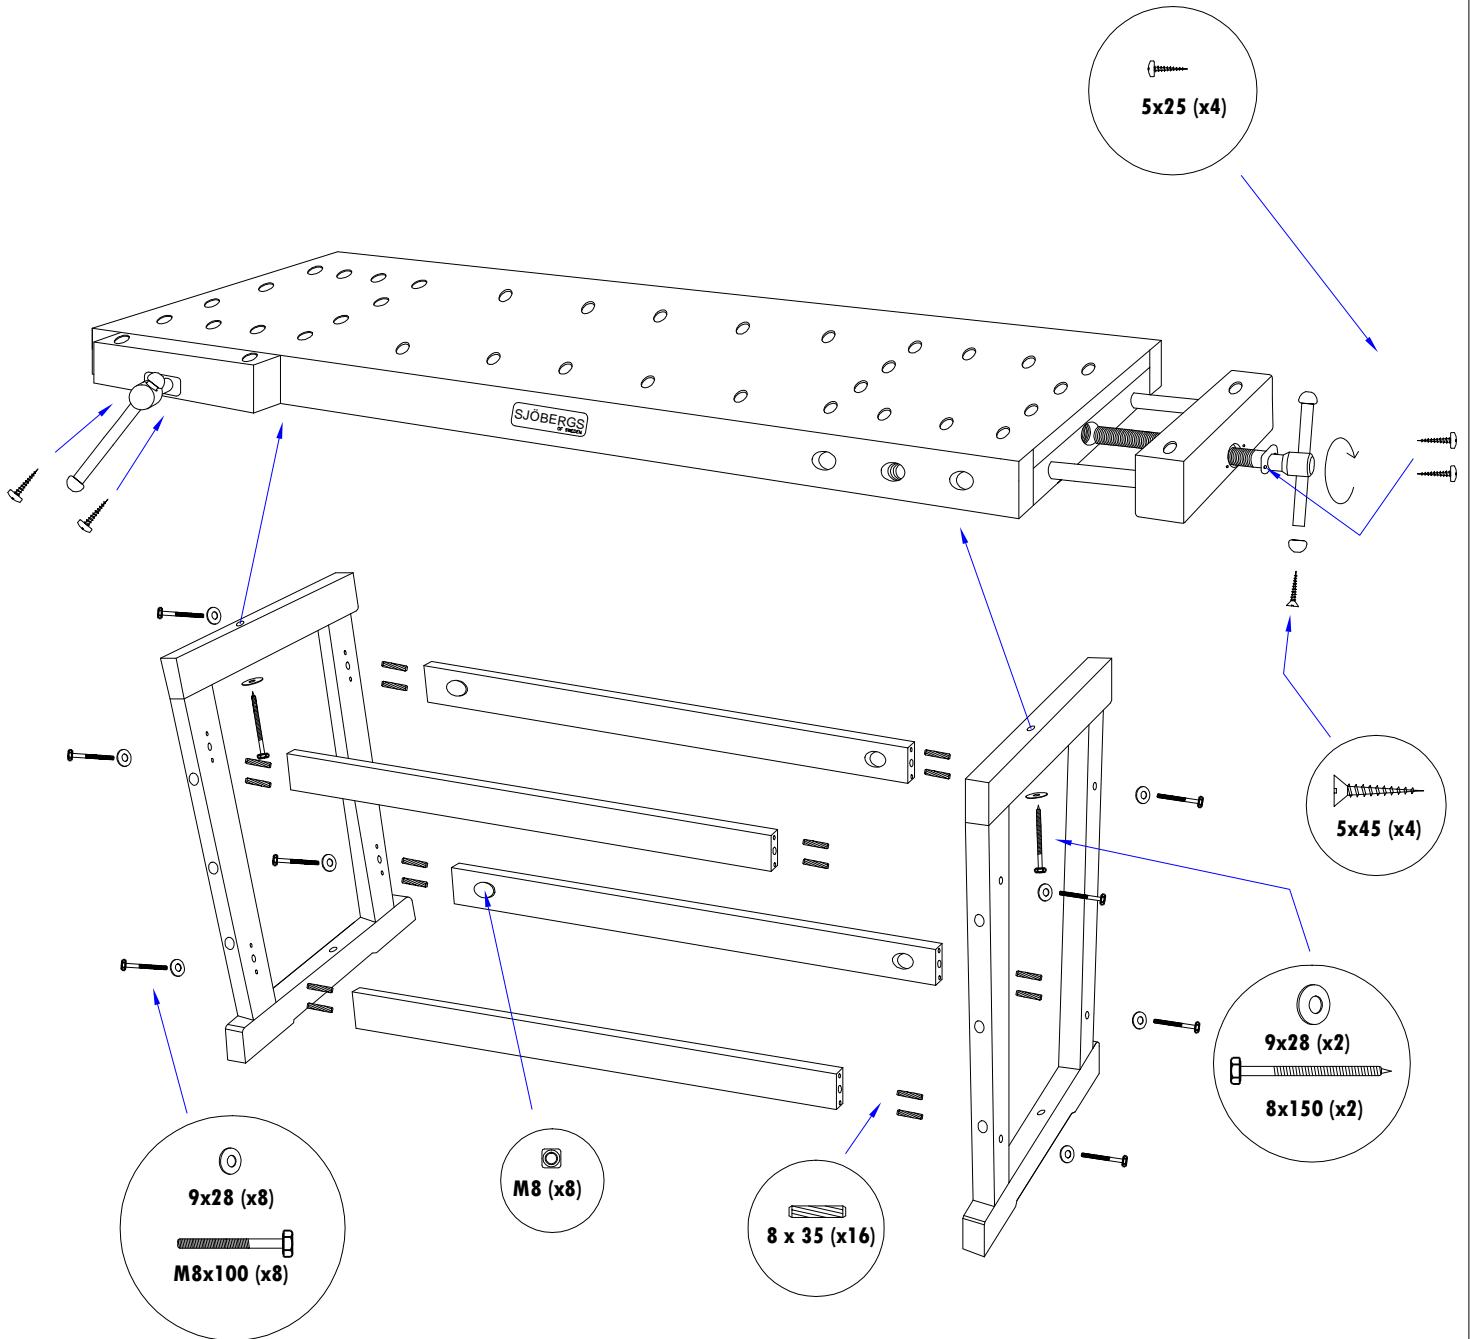


Utförare : PIBL	Artikelnummer: 700992	Datum : 2007-10-17	Dokumentnamn : MB. 18	Utgåva : 03
--------------------	--------------------------	-----------------------	--------------------------	----------------

Assembly Instructions DUO

- 
M8x100 (x8)
- 
9x28 (x10)
- 
M8 (x8)
- 
8 x 35 (x16)
- 
8x150 (x2)
- 
5x25 (x4)
- 
5x45 (x4)
- 
(x4)
- 
(x1)



Utförare : PIBL	Artikelnummer: 700992	Datum : 2007-10-17	Dokumentnamn : MB. 18	Utgåva : 03
--------------------	--------------------------	-----------------------	--------------------------	----------------

LOOKING AFTER YOUR WORKBENCH

The top of your new Sjöberg bench has been oiled.

The wood used in the construction **has been kiln dried** and should be treated in the same way as domestic furniture.

A high humidity (e.g. unheated workshop or a region of high humidity) **is not ideal.**

You can help reduce any potential moisture related problems by oiling the underside of the bench top and the dog holes using an oil finish (Tung, Walnut, Danish, etc).

After a period of use, your bench top may become dented and scratched. With a gentle sanding followed by an application of oil your bench will look like new again.

To make the bench completely stable it can be bolted to the floor through the pre-drilled holes in the trestle. (Fixing bolts not supplied)

If you have any problem with your Sjöberg bench, please contact your supplier.

Accessories:
Storage Module SM 03

